


# DG231 & DS232 Series Drain Vessels

**316L Stainless Steel & Glass**  
**Pressure, 7 or 10 Bar**  
**Ports, 1/8" or 1/4"**



DG231.221

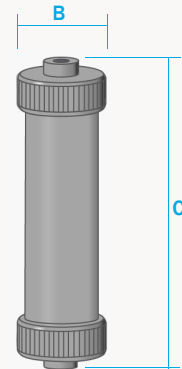

DS232.221

These drain vessels are specified to increase the housing capacity in coalescing applications where an automatic float drain cannot be used. They are constructed from 316L stainless steel and have either a stainless steel or a Pyrex glass bowl with a bowl guard (not shown).

Standard housings have NPT ports and include Viton gaskets. Other gasket types are available as an option.

## Principal Specifications

Housing Model	DG231.111	DG231.221	DS232.111	DS232.221
Port Size - NPT	1/8"	1/4"	1/8"	1/4"
Drain - NPT	1/8"	1/4"	1/8"	1/4"
Maximum Pressure - Bar (1)	7	7	10	10
Maximum Temperature - °C (2)	100	100	200	200
<b>Materials of Construction (3)</b>				
Head & Internals	316L	316L	316L	316L
Bowl	Pyrex Glass	Pyrex Glass	316L	316L
Gaskets	Viton	Viton	Viton	Viton
<b>Principal Dimensions</b>				
B - mm	56	56	56	56
C - mm	235	235	235	235
Volume - cc	255	255	255	255
Weight - kg	0.9	0.9	0.9	0.9
<b>Accessories</b>				
Standard Gasket Set	GVSG211	GVSG211	GVSG211	GVSS117
PTFE Gasket Set	GTSG211	GTSG211	GTSG211	GTSS117
Kalrez Gasket Set	GKSG211	GKSG211	GKSG211	GKSS117
Nitrile Gasket Set	GNSG211	GNSG211	GNSG211	GNSS117
EPDM Gasket Set	GESG211	GESG211	GESG211	GESS117

**Notes** (1) Material abbreviations - 316L = 316L Stainless Steel, PTFE = Polytetrafluoroethylene, EPDM = Ethylene-Propylene