# **Vapour Adsorption**

Coalescing filter elements will only remove liquid aerosols and droplets. If there is a liquid in vapour form to be removed then an adsorber cartridge should be used in an additional housing as a final stage.


Adsorption cartridges can also be used to remove elements of a gas, for example acidic gases. A range of adsorber materials are available and these are listed below.

## **Cartridge Types**

We have three different styles of adsorber cartridge available - each designed for a particular filter housing.

The AD and AT types can be installed into a standard housing. The AS is designed for small stainless steel housings and to install this type the housing tie rod should be removed.

Refer to the housing data sheets to select the correct size and type of cartridge required.

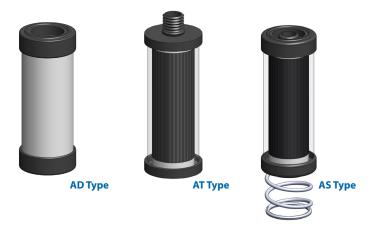

| Technical Sp             | ecificat | tions     |                 |           |           |                |         |  |
|--------------------------|----------|-----------|-----------------|-----------|-----------|----------------|---------|--|
| Cartridge Type (1)       |          |           | □.AD□           |           |           | □ <b>.AT</b> □ | □.AS□   |  |
| Maximum Temperatur       | e, °C    |           | 50              |           |           | 50             | 50      |  |
| Materials of Construct   | ion      |           |                 |           |           |                |         |  |
| Body                     |          | Mi        | crofibre Filter | 's        |           | Acrylic        | Acrylic |  |
| End Caps                 |          |           | PA              |           |           | PA             | PA      |  |
| Seal                     |          |           | Viton           |           |           | Viton          | Viton   |  |
| Filter Pads              |          |           | -               |           |           | PE             | PE      |  |
| Spring                   |          |           | -               |           |           | -              | SS      |  |
| Adsorber (see table belo | ow)      |           |                 |           |           |                |         |  |
| Standard Siz             | es       |           |                 |           |           |                |         |  |
| 12.32. 🗆 12.57. 🗆        | 25.64. 🗆 | 25.178. 🗆 | 32.152. 🗆       | 51.230. □ | 51.476. 🗆 |                |         |  |

| Cuada | Adaquhau                  | Deinsinle Hees                                    |
|-------|---------------------------|---|
| Grade | Adsorber                  | Principle Uses                                    |
| 01    | Activated Carbon Granules | Removal of hydrocarbons and other organic vapours |
| 02    | Activated Carbon Cloth    | Removal of hydrocarbons and other organic vapours |
| 03    | Molecular Sieve 4A        | Removal of CO2, NH3, H2S, SOx                     |
| 04    | Molecular Sieve 13X       | Removal of CO2, NH3, H2S, SOx, aromatics, amines  |
| 05    | Silica Gel (Blue)         | Removal of water vapour                           |
| 05a   | Silica Gel (Orange)       | Removal of water vapour                           |
| 06    | Mixed Bases (Soda Lime)   | Removal of acidic gases, CO2, SOX, NOX, HCI       |
| 07    | Potassium Permanganate    | Removal of SOX and other acidic gases             |
| 08    | Hopcalite                 | Removal of CO by catalytic conversions to CO2     |

#### Notes

(1) Replace the first  $\square$  with the cartridge size and the second  $\square$  with the adsorber required, e.g. 12.57.ASO1



## **Contact Us**

Classic Filters Ltd.
Sextant Park
Neptune Close
Rochester
Kent
England
ME2 4LU

T +44 (0)1634 724224

F +44 (0)1634 724234

E info@classicfilters.com

W www.classicfilters.com

## **Follow Us**



http://www.linkedin.com/company/classic-filters-ltd.



http://www.twitter.com/classicfilters