

SLW106 Series


Disc Filter Housing

Materials	316L Stainless Steel
Pressure	3000 psi
Ports	1/8" or 1/4"
Element	FD.19.S□

The SLW106 series housings use a flat disc filter and are designed for applications where a minimum volume is required for fast response times and for final "safety" filters after other filter housings. The straight-through flow design ensures a compact and lightweight high pressure filter housing.

Standard housings have NPT ports, tube fittings or Face Seal connections.

A range of different filter discs can be supplied.

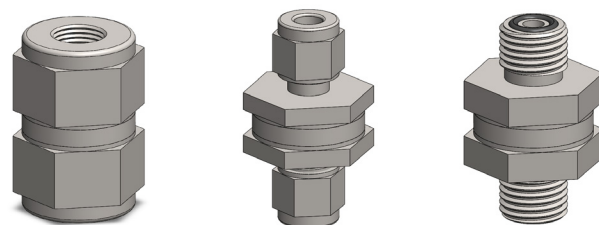

Technical Specifications

Housing Model	SLW106.101	SLW106.201	SLW106.108	SLW106.208	SLW106.2.CFO
Port Size	1/8" NPT	1/4" NPT	1/8" Tube Fitting	1/4" Tube Fitting	1/4" Face Seal
Maximum Pressure, psi (1)	3000	3000	3000	3000	3000
Maximum Temperature, °F (2)	390	390	390	390	390
Materials of Construction (2)					
Body	316L SS	316L SS	316L SS	316L SS	316L SS
Filter Disc Suffix (3)	.S□	.S□	.S□	.S□	.S□
Pleated Filter Disc Suffix (3)	.SP□	.SP□	.SP□	.SP□	.SP□
Principal Dimensions in inches					
Hexagon AF	1.00	1.00	1.00	1.00	1.00
Height	1.57	1.57	1.57	1.57	1.64
Weight, lbs	0.29	0.29	0.19	0.19	0.19

Notes

(1) Above 390°F the pressure rating is reduced, consult us for the exact rating at any specific temperature

(2) Material abbreviations, 316L SS = 316L Stainless Steel

(3) Replace the □ with the grade required, e.g. SLW106.201.S40, SLW106.208.SP2



Contact Us

Classic Filters Ltd.
Sextant Park
Neptune Close
Rochester
Kent
England
ME2 4LU

T +44 (0)1634 724224
F +44 (0)1634 724234
E info@classicfilters.com
W www.classicfilters.com

Follow Us



[http://www.linkedin.com/company/classic-filters-ltd.](http://www.linkedin.com/company/classic-filters-ltd)



<http://www.twitter.com/classicfilters>